


Installation guide

Service thermostats Type **077B7**





077R0701

Service thermostats 077B7001 - Refrigerators



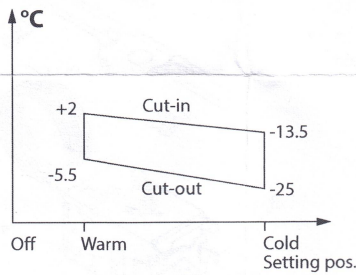


EBD



Length of capillary (mm): $L = 1300 + 30/-0$
Min. sensor length mounted on evaporator (mm): $LS = 115$
(Used as airtensor min. $2 \times LS$)


Service thermostats 077B7002 - Refrigerators with push button defrost

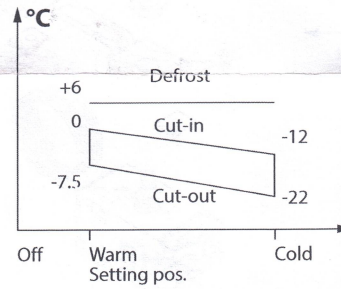



Length of capillary (mm): $L = 1300 + 30/-0$
Min. sensor length mounted on evaporator (mm): $LS = 115$
(Used as airtensor min. $2 \times LS$)

077R0701

Service thermostats 077B7003 - Refrigerators with automatic defrost

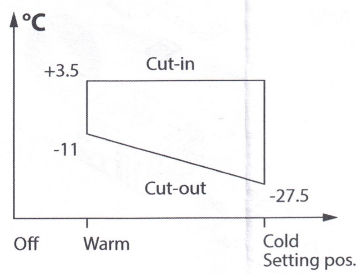


EBD





Length of capillary (mm): $L = 1600 + 50/-0$
Min. sensor length mounted on evaporator (mm): $LS = 125$
(Used as airtensor min. $2 \times LS$)

Service thermostats 077B7004 - Absorption refrigerators

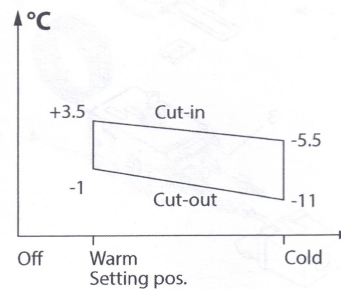

EBD



Length of capillary (mm): $L = 1500 + 50/-0$
Min. sensor length mounted on evaporator (mm): $LS = 95$
(Used as airtensor min. $2 \times LS$)

Info for UK customers only: Danfoss Ltd., 22 Wycombe End, HP9 1NB, GB

Імпортёр: ТОВ з іі "Данфосс ТОВ" 04080, Київ 80, п/с 168, Україна